

# The physics of Curling

Non central elastic collision of two identical circular stones

This is an article from my home page: [www.olewithhansen.dk](http://www.olewithhansen.dk)



## Contents

1. Curling and the physics of collisions .....	1
2. The central elastic collision.....	1
2.1. Introducing the centre of mass (CM) system.....	3
3. The physics of curling.....	4
3.1 Non central collision in the CM-system .....	6
3.2 Example .....	8

## 1. Curling and the physics of collisions

Curling is an excellent example of demonstrating a non central elastic collision of two identical bodies on an (almost) frictionless underlay.

The non central collision is, however, much more physically and mathematically intriguing, than the central collision, which was earlier an integrated part of the Danish curriculum in the 9-12 grade high school.

We shall therefore begin discussing the central collision with two bodies with different masses to introduce general concepts and notations.

## 2. The central elastic collision

We shall consider a central collision of two bodies (1) and (2). Since the movements are along a straight line, we shall drop the vector symbols, and instead use signed variables.

Velocities before the collision are consequently designated with a low letter  $u$ , and velocities after the collision are consequently designated with a low letter  $v$ . The two bodies are designated with subscript (1) and (2). So for example:  $v_1$ , is the velocity of body (1) after the collision.

To ease the mathematics, we shall initially perform the calculation with the assumption that body (2) is at rest before the collision, so that  $u_2 = 0$ . Afterwards we shall deal with the general case.

For the elastic central collision we have conservation of energy as well as conservation of momentum.

$$(2.1) \quad I: m_1 u_1 = m_1 v_1 + m_2 v_2 \quad (\text{Conservation of momentum, where } u_2 = 0)$$

$$II: \frac{1}{2} m_1 u_1^2 = \frac{1}{2} m_1 v_1^2 + \frac{1}{2} m_2 v_2^2 \quad (\text{Conservation of the kinetic energy})$$

We shall then solve these two (nonlinear) equations to find  $v_1$  and  $v_2$ , the velocities after the collision. This is done by some mathematical rearrangement.

$$(2.2) \quad \begin{array}{ll} I: m_1(u_1 - v_1) = m_2 v_2 & I: m_1(u_1 - v_1) = m_2 v_2 \\ II: \frac{1}{2} m_1(u_1^2 - v_1^2) = \frac{1}{2} m_2 v_2^2 & II: m_1(u_1 - v_1)(u_1 + v_1) = m_2 v_2^2 \end{array} \Leftrightarrow$$

In the latter expressions we then divide  $II$  with  $I$ , but keeping  $I$  for the sake of doing one to one calculations.

$$\begin{array}{ll} I: m_1(u_1 - v_1) = m_2 v_2 & I: m_1(u_1 - v_1) = m_2 v_2 \\ II: (u_1 + v_1) = v_2 \vee v_2 = 0 & II: u_1 + v_1 = v_2 \vee v_2 = 0 \end{array} \Leftrightarrow$$

$$I: u_1 - v_1 = 0 \quad \vee \quad I + II: m_1(u_1 - v_1) = m_2(u_1 + v_1)$$

From the last expression, we may find  $v_1$ , and subsequently find  $v_2$  by inserting it in  $u_1 + v_1 = v_2$ .

$(2.3) \quad v_1 = \frac{m_1 - m_2}{m_1 + m_2} u_1 \quad \wedge \quad v_2 = \frac{2m_1}{m_1 + m_2} u_1 \quad \vee \quad v_2 = 0 \quad \wedge \quad v_1 = u_1$
---

From (2.3) it appears that the velocities after the collision  $v_1$  and  $v_2$  can be evaluated when the velocity  $u_1$  together with the masses  $m_1$  and  $m_2$  are known.

The solution  $v_2=0$ , although mathematically correct, has no physical interest since it means that the two bodies passing each other without interacting.

From the solution it is also evident that  $v_2$  (the velocity of (2) after the collision) is always unidirectional to  $u_1$ , (the velocity of (1) before the collision), while  $v_1$  (the velocity of (1) after the collision) is unidirectional to  $u_1$  if  $m_1 > m_2$ , and opposite directed  $u_1$  if  $m_1 < m_2$  (it is reflected) In the case  $m_1 = m_2$ , we can see that  $v_2 = u_1$  and  $v_1 = 0$ . This means that the two bodies swap velocities, a phenomenon, which is well known for any pool player.

If we assume that  $m_2$  is infinitely larger than  $m_1$ , (e.g. a ball hits the floor), then we know the result from experience, but the equations also give the answer, if we divide (1.7) by  $m_2$  both in the numerator and denominator, and uses that  $m_1:m_2$  is practically zero.

$$v_1 = \frac{\frac{m_1}{m_2} - 1}{\frac{m_1}{m_2} + 1} u_1 = -u_1 \quad \wedge \quad v_2 = \frac{2 \frac{m_1}{m_2}}{\frac{m_1}{m_2} + 1} u_1 = 0$$

The floor rests where it is, and the ball returns with the same but opposite velocity. We have included this result, because it is imperative for developing the kinetic theory of gasses.

The general case, where both bodies are moving before the collision can be treated similar to the derivations above, requiring only a little more mathematical cunning.

$$I: m_1 u_1 + m_2 u_2 = m_1 v_1 + m_2 v_2 \quad (\text{Conservation of momentum, where } u_2 \diamond 0)$$

$$II: \frac{1}{2} m_1 u_1^2 + \frac{1}{2} m_2 u_2^2 = \frac{1}{2} m_1 v_1^2 + \frac{1}{2} m_2 v_2^2 \quad (\text{Conservation of the kinetic energy})$$

$$I: m_1(u_1 - v_1) = m_2(v_2 - u_2)$$

$$II: m_1(u_1^2 - v_1^2) = m_2(v_2^2 - u_2^2)$$

$$I: m_1(u_1 - v_1) = m_2(v_2 - u_2)$$

$$II: m_1(u_1 - v_1)(u_1 + v_1) = m_2(v_2 - u_2)(v_2 + u_2)$$

Dividing II by I:

$$I: m_1(u_1 - v_1) = m_2(v_2 - u_2)$$

$$II: u_1 + v_1 = v_2 + u_2$$

$$I: m_2 v_2 + m_1 v_1 = m_1 u_1 + m_2 u_2 \qquad I: m_2 v_2 + m_1 v_1 = m_1 u_1 + m_2 u_2$$

$$II: v_2 - v_1 = u_1 - u_2 \qquad II: m_1 v_2 - m_1 v_1 = m_1 u_1 - m_1 u_2$$

$$(m_1 + m_2)v_2 = 2m_1 u_1 + (m_2 - m_1)u_2 = 2(m_1 u_1 + m_2 u_2) - (m_1 + m_2)u_2$$

When solving for  $v_2$ , we find the expression below. The expression for  $v_1$  is found in the same manner.

$$(2.4) \quad v_1 = \frac{2(m_1 u_1 + m_2 u_2)}{m_1 + m_2} - u_1 \quad \wedge \quad v_2 = \frac{2(m_1 u_1 + m_2 u_2)}{m_1 + m_2} - u_2$$

If we put  $u_2 = 0$ , we retrieve (after a minor reduction) the expressions (2.3).

### 2.1. Introducing the centre of mass (CM) system.

For two particles the, having velocities  $\vec{u}_1$  and  $\vec{u}_2$ , and masses  $m_1$  and  $m_2$ , the velocity of the CM-system  $\vec{v}_{CM}$  (It is the velocity of the Centre of mass) is given by the equation:

$$(2.5) \quad \vec{v}_{CM} = \frac{m_1 \vec{u}_1 + m_2 \vec{u}_2}{m_1 + m_2}$$

Velocities in the CM are consequently designated with a hyphen. So we have:

$$(2.6) \quad \vec{u}_1 = \vec{u}_1' + \vec{v}_{CM} \quad \Rightarrow \quad \vec{u}_1' = \vec{u}_1 - \vec{v}_{CM} = \vec{u}_1 - \frac{m_1 \vec{u}_1 + m_2 \vec{u}_2}{m_1 + m_2}$$

$$\vec{u}_1' = \frac{m_2(\vec{u}_1 - \vec{u}_2)}{m_1 + m_2} \quad \text{And in a similar manner:} \quad \vec{u}_2' = -\frac{m_1(\vec{u}_1 - \vec{u}_2)}{m_1 + m_2}$$

We notice that to total momentum of the system is zero, since:

$$(2.7) \quad \vec{p}_1' + \vec{p}_2' = m_1 \vec{u}_1' + m_2 \vec{u}_2' = \frac{m_1 m_2 (\vec{u}_1 - \vec{u}_2)}{m_1 + m_2} - \frac{m_2 m_1 (\vec{u}_1 - \vec{u}_2)}{m_1 + m_2} = \vec{0}, \text{ which implies that:}$$

$$\vec{u}_2' = -\frac{m_1}{m_2} \vec{u}_1' \quad \text{and if the masses are equal:} \quad \vec{u}_2' = -\vec{u}_1'$$

In the CM the two masses have opposite directed velocities. If the masses are equal, so are the velocities. After a collision, we have exactly the same equations if we replace  $u$  by  $v$ .

Notice that the equations above applies, whether the collision is central or not.

If the particle (2) is at rest before the collision the formulas take a simpler form:

$$\vec{u}_1' = \frac{m_2 \vec{u}_1}{m_1 + m_2} \quad \text{and} \quad \vec{u}_2' = -\frac{m_1 \vec{u}_1}{m_1 + m_2}$$

### 3. The physics of curling

We shall then consider two identical balls (or two curling stones) colliding in a non central impact, where one of them at rest before the collision. (Without these conditions the mathematics simply becomes incomprehensible). Our aim is to find the deflection angles for both bodies, and their velocities after the collision in the Lab-system.

In the lab-system the velocities of two equal masses must be perpendicular after the collision. This follows from conservation of momentum and energy:


$$m\vec{v}_1 + m\vec{v}_2 = m\vec{u}_1 \quad \text{and} \quad \frac{1}{2}mv_1^2 + \frac{1}{2}mv_2^2 = \frac{1}{2}mu_1^2 \quad \Rightarrow$$

$$\vec{v}_1 + \vec{v}_2 = \vec{u}_1 \quad \text{and} \quad v_1^2 + v_2^2 = u_1^2$$

We can see that the three vectors form a triangle for which Pythagoras theorem holds, and therefore:  $\vec{v}_1 \perp \vec{v}_2$ . This applies for example for curling stones.


In the figure below is sketched the collision in the Lab-system.

Our aim is to find the angle  $\varphi_1$ , ( $\varphi_2 = 90 - \varphi_1$ ) together with  $v_1$  and  $v_2$  expressed by  $u_1$  and the impact parameter  $\rho$  which is perpendicular distances between the two centres.

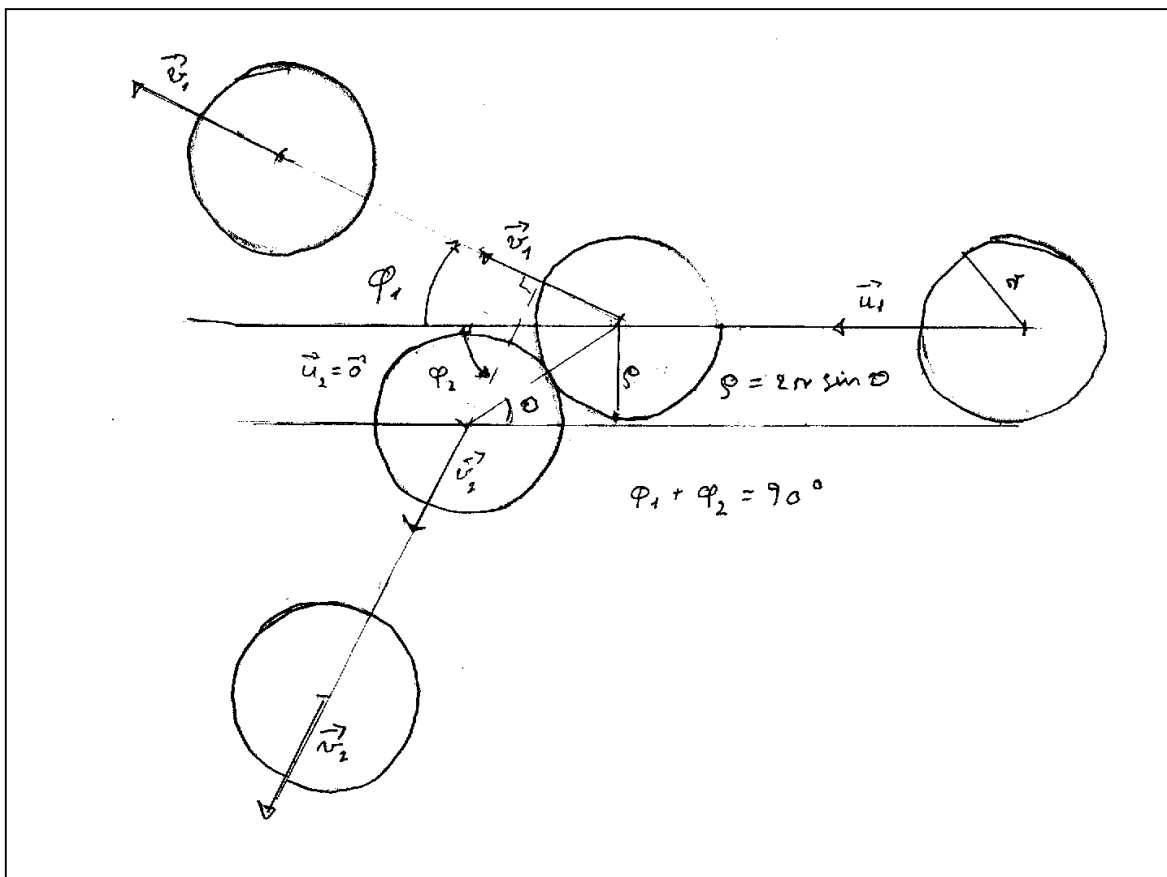

It turns out that it is not really possible to solve the problem in the Lab-system, so we shall look at the collision in the CM-system, and take advantage of the symmetry in this system.

So in the figure below, we show how the collision looks like in the CM-system

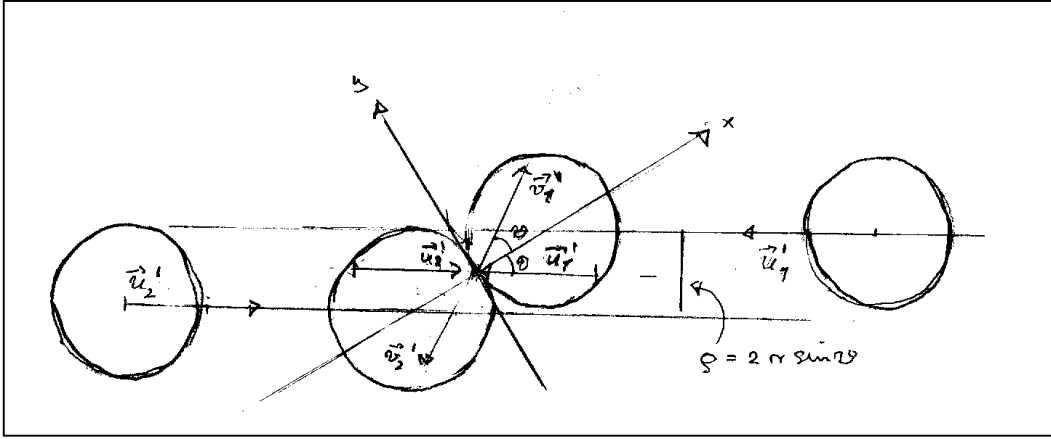

We have supplied with a coordinate system, which has its origin at the point of impact, and where the  $x$ -axis connects the two centres, and the  $y$ -axis is tangent to the two circular bodies at that point. Since the masses are the same, then:  $\vec{u}_2' = -\vec{u}_1'$ .

Since the collision for each ball, corresponds to the reflection against a wall the only thing that happens is that the  $x$ -coordinate changes sign. This can also be seen from the equations:

(Momentum conservation for equal masses):  $\vec{v}_2' = -\vec{v}_1'$  and  $\vec{u}_2' = -\vec{u}_1'$ .

Further we must have  $v_2' = v_1' = u_1'$ .

The last equation may be understood from conservation of energy. (for typographical reasons we drop the hyphen)

$$\frac{1}{2}mu_1^2 + \frac{1}{2}mu_2^2 = \frac{1}{2}mv_1^2 + \frac{1}{2}mv_2^2 \Leftrightarrow u_1^2 + u_2^2 = v_1^2 + v_2^2 \Leftrightarrow 2u_1^2 = 2v_1^2 \Leftrightarrow v_1 = u_1$$

This equation actually also holds in the CM if the masses are not equal: It follows from conservation of momentum and energy:

$$\begin{aligned} m_1\vec{u}_1 + m_2\vec{u}_2 = \vec{0} \quad \wedge \quad m_1\vec{v}_1 + m_2\vec{v}_2 = \vec{0} &\Rightarrow u_2 = \frac{m_1}{m_2}u_1 \quad \wedge \quad v_2 = \frac{m_1}{m_2}v_1 \\ \frac{1}{2}m_1u_1^2 + \frac{1}{2}m_2u_2^2 = \frac{1}{2}m_1v_1^2 + \frac{1}{2}m_2v_2^2 &\Rightarrow \\ m_1u_1^2 + m_2\left(\frac{m_1}{m_2}u_1\right)^2 = m_1v_1^2 + m_2\left(\frac{m_1}{m_2}v_1\right)^2 &\Rightarrow \\ \frac{m_1(m_1 + m_2)}{m_2}u_1^2 = \frac{m_1(m_1 + m_2)}{m_2}v_1^2 &\Rightarrow v_1 = u_1 \end{aligned}$$

For an elastic collision in the CM-system, the masses are reflected as if they hit a wall.

For the elastic central collision in the Lab system where  $u_2 = 0$ , the velocities after the collision are given by (2.3). We shall then find the velocities in the CM-system.

$$v_1 = \frac{m_1 - m_2}{m_1 + m_2}u_1 \quad \wedge \quad v_2 = \frac{2m_1}{m_1 + m_2}u_1 \quad \text{and} \quad v_{CM} = \frac{m_1u_1}{m_1 + m_2}$$

The physics of curling  
Non central elastic collision of two identical circular stones

$$u_1 = u_1' + v_{CM} \Rightarrow u_1' = u_1 - v_{CM} = u_1 - \frac{m_1 u_1}{m_1 + m_2} = \frac{m_2 u_1}{m_1 + m_2}$$

$$u_2 = u_2' + v_{CM} \Rightarrow u_2' = u_2 - v_{CM} = 0 - \frac{m_1 u_1}{m_1 + m_2} = -\frac{m_1 u_1}{m_1 + m_2}$$

$$v_1 = v_1' + v_{CM} \Rightarrow v_1' = v_1 - v_{CM} = \frac{m_1 - m_2}{m_1 + m_2} u_1 - \frac{m_1 u_1}{m_1 + m_2} = -\frac{m_2 u_1}{m_1 + m_2}$$

$$v_2 = v_2' + v_{CM} \Rightarrow v_2' = v_2 - v_{CM} = \frac{2m_1}{m_1 + m_2} u_1 - \frac{m_1}{m_1 + m_2} u_1 = \frac{m_1 u_1}{m_1 + m_2}$$

From this we conclude that:

$$m_1 u_1' + m_2 u_2' = 0 \quad \wedge \quad m_1 v_1' + m_2 v_2' = 0 \quad \text{and} \quad v_1' = -u_1' \quad \wedge \quad v_2' = -u_2'$$

### 3.1 Non central collision in the CM-system

For a central collision in the CM, the two balls are reflected as if they hit a wall, and the same thing happens for the non central collision in the CM-system. From the figure above, we can see:

$$\vec{u}_1' = u_1'(-\cos\theta, \sin\theta) \quad \text{and} \quad \vec{u}_2' = u_2'(\cos\theta, -\sin\theta) \quad \text{and since} \quad v_2' = v_1' = u_1' = u_2'$$

$$\vec{u}_1' = u_1'(-\cos\theta, \sin\theta) \quad \text{and} \quad \vec{u}_2' = u_1'(\cos\theta, -\sin\theta) \quad (\vec{u}_2' = -\vec{u}_1')$$

$$\vec{v}_1' = u_1'(\cos\theta, \sin\theta) \quad \text{and} \quad \vec{v}_2' = u_1'(-\cos\theta, -\sin\theta) \quad (\vec{v}_2' = -\vec{v}_1')$$

The Lab system has its  $x$ -axis along the incoming stone.

$$\text{In this coordinate system we have: } \vec{v}_{CM} = \frac{m_1 \vec{u}_1 + m_2 \vec{u}_2}{m_1 + m_2} = \frac{1}{2} \vec{u}_1 = \frac{1}{2} u_1 (1, 0)$$

and in the Lab-system system: Notice caused by the orientation of the Lab-system the scattering angle is  $2\theta - 180$

$$\begin{aligned} \vec{u}_1' &= u_1'(1, 0) \quad , \quad \vec{u}_2' = u_1'(-1, 0) \quad , \\ \vec{v}_1' &= u_1'(-\cos(2\theta - 180), -\sin(2\theta - 180)) \quad , \\ \vec{v}_2' &= u_1'(\cos(2\theta - 180), \sin(2\theta - 180)) \\ \vec{v}_1' &= u_1'(\cos 2\theta, \sin 2\theta) \quad , \quad \vec{v}_2' = u_1'(-\cos 2\theta, -\sin 2\theta) \end{aligned}$$

We then transform the velocities to the Lab-system:

$$\begin{aligned} \vec{u}_1 &= \vec{u}_1' + \vec{v}_{CM} \Rightarrow \vec{u}_1 = \vec{u}_1' - \frac{1}{2} \vec{u}_1 = \frac{1}{2} \vec{u}_1 = \frac{1}{2} u_1 (1, 0) \\ \vec{u}_2 &= \vec{u}_2' + \vec{v}_{CM} \Rightarrow \vec{u}_2 = \vec{u}_2' - \frac{1}{2} \vec{u}_1 = \vec{0} - \frac{1}{2} \vec{u}_1 = \frac{1}{2} u_1 (-1, 0) \end{aligned}$$

If we put  $\varphi = 2\theta$ , then we have:



$$\vec{v}_1' = u_1'(\cos \varphi, \sin \varphi) \quad \text{og} \quad \vec{v}_2' = -u_1'(\cos \varphi, \sin \varphi)$$

And in the Lab-system:

$$\vec{v}_1 = \vec{v}_1' + \vec{v}_{CM} = \frac{1}{2}u_1(\cos \varphi, \sin \varphi) + \frac{1}{2}u_1(1,0) = \frac{1}{2}u_1(\cos \varphi + 1, \sin \varphi)$$

$$\vec{v}_2 = \vec{v}_2' + \vec{v}_{CM} = -\frac{1}{2}u_1(\cos \varphi, \sin \varphi) + \frac{1}{2}u_1(1,0) = -\frac{1}{2}u_1(\cos \varphi - 1, \sin \varphi)$$

We may verify that the two velocities are perpendicular to each other, since:

$$\vec{v}_1 \cdot \vec{v}_2 = -\frac{1}{4}u_1^2((\cos \varphi - 1)(\cos \varphi + 1) + \sin^2 \varphi) = \cos^2 \varphi - 1 + \sin^2 \varphi = 0$$

The angle of deflection for (1) is given by:

$$\tan \varphi_1 = \frac{v_{1y}}{v_{1x}} = \frac{\sin \varphi}{\cos \varphi + 1} = \frac{\sin 2\theta}{\cos 2\theta + 1} = \frac{2 \sin \theta \cos \theta}{1 - 2 \sin^2 \theta - 1} = -\frac{1}{\tan \theta} = -\frac{\sqrt{1 - \sin^2 \theta}}{\sin \theta} \quad \text{or}$$

$$\sin \varphi_1 = \frac{v_{1y}}{\sqrt{v_{1x}^2 + v_{1y}^2}} = \frac{\sin 2\theta}{\sqrt{(\cos 2\theta + 1)^2 + \sin^2 2\theta}} = \frac{\sin 2\theta}{\sqrt{\cos^2 2\theta + 1 + 2 \cos 2\theta + \sin^2 2\theta}} = \frac{2 \sin \theta \cos \theta}{\sqrt{2 + 2 \cos 2\theta}}$$

$$\sin \varphi_1 = \frac{2 \sin \theta \cos \theta}{\sqrt{2 + 2(2 \cos^2 \theta - 1)}} = \frac{2 \sin \theta \cos \theta}{2\sqrt{\cos^2 \theta}} = \sin \theta$$

But these expressions are not so interesting, when it is not linked to the impact parameter:

The impact parameter is:  $\rho = 2r \sin \theta \Leftrightarrow \sin \theta = \frac{\rho}{2r} = x$

$$\tan \varphi_1 = -\frac{1}{\tan \theta} = -\frac{\sqrt{1 - x^2}}{x} \quad \text{and} \quad \sin \varphi_1 = \sin \theta = x$$


$$\tan \varphi_1 = -\frac{1}{\tan \theta} = -\frac{\sqrt{1 - x^2}}{x} \quad \text{and} \quad \sin \varphi_1 = \cos \theta = \sqrt{1 - x^2}$$

Finally we shall find the speed of the two stones after the collision:

Below is shown a graph, where the deflection angle  $\varphi_1$  is mapped as a function of  $\frac{\rho}{2r} = x$ .

$$\vec{v}_1 = \frac{1}{2}u_1(\cos 2\theta + 1, \sin 2\theta) \Rightarrow v_1 = \frac{1}{2}u_1\sqrt{(\cos 2\theta + 1)^2 + \sin^2 2\theta} = \frac{1}{2}u_1 2 \cos \theta = u_1 \sqrt{1 - x^2}$$

$$\vec{v}_2 = -u_1(\cos 2\theta - 1, \sin 2\theta) \Rightarrow v_2 = \frac{1}{2}u_1\sqrt{(\cos 2\theta - 1)^2 + \sin^2 2\theta} = \frac{1}{2}u_1 2 \sin \theta = u_1 x$$

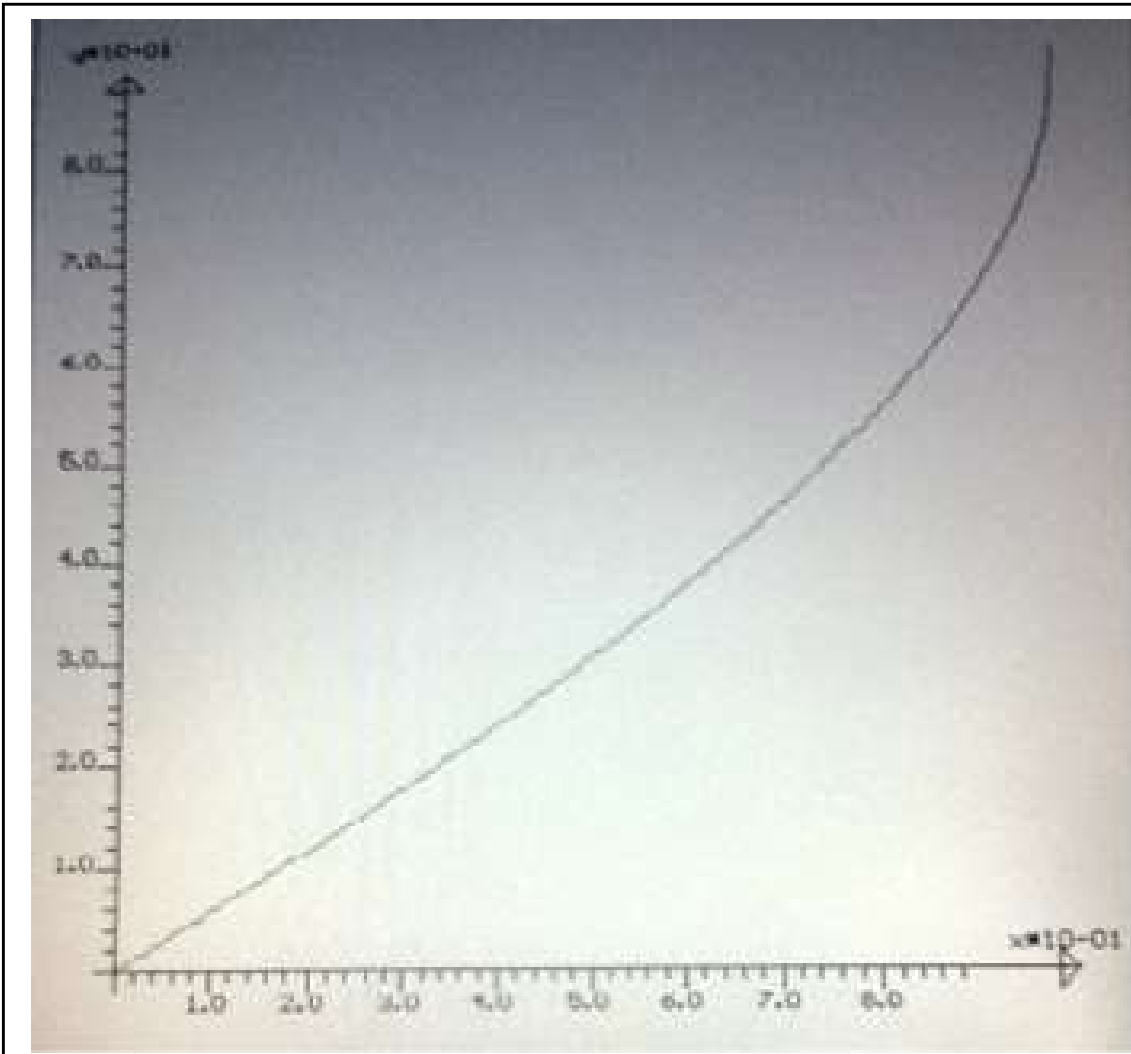

### 3.2 Example

The stones have a circumference 91.4 cm, so the radius  $r = \frac{91.4 \text{ cm}}{2\pi} = 14.5 \text{ cm}$

If the incoming stone has a speed of 2.0 m/s and an impact parameter, equal to the radius, then it correspond to  $x = 0.5$ , and we find the deflection angle from:

$$\sin \varphi_1 = \sin x : \quad \varphi_1 = \sin^{-1} 0.5 = 30^\circ, \text{ and therefore: } \varphi_2 = 60^\circ$$

The speed of the two stones after the collision are:

$$v_1 = u_1 \sqrt{1-x^2} = \sqrt{3} \text{ m/s } \text{ og } v_2 = u_1 x = 1.0 \text{ m/s}$$

And if the impact parameter  $\rho = 0.9 \cdot 2r : x = 0.9$  then the results are:

$$\varphi_1 = 34.2^\circ, \quad v_1 = u_1 \sqrt{1-x^2} = 0.872 \text{ m/s } \text{ and } v_2 = u_1 x = 1.8 \text{ m/s}$$

Curling is about an extreme visually based precision. We shall try to calculate how much the angle changes if  $x$  changes with  $\Delta x = 0.01$  at  $x = 0.5$  corresponding to  $\rho = 14.5 \text{ cm}$   $\Delta\rho = 0.29 \text{ cm}$

We have:  $\sin \varphi_1 = \sin \theta = x$ , so that  $\varphi_1 = \sin^{-1} x$  and  $\frac{d}{dx} \sin^{-1} x = \frac{1}{\sqrt{1-x^2}}$ ,

Thus:

$$\frac{d\varphi_1}{dx} = \frac{x}{\sqrt{1-x^2}} = \frac{1}{\sqrt{1-x^2}} \Rightarrow \Delta\varphi_1 = \frac{180}{\pi} \frac{1}{\sqrt{1-x^2}} \Delta x = 0,66^\circ$$

Gliding  $1 \text{ m}$ , it will correspond to a deviation perpendicular to the motion of  $11.5 \text{ cm}$ .

We may also find the deviation perpendicular to the motion on a lane of  $40 \text{ m}$ .

If the stone is sent away with an deviation in angle on  $1^\circ$ , then the deviation at the en of the lane:

$$1.0^\circ \frac{\pi}{180} 40\text{m} = 0.69 \text{ m} = 69 \text{ cm}.$$

I have therefore always wondered how they do it!

The results have been derived for curling stones, but they are equally applicable for billiard balls.